

# BATTERY DRIVE, FTP-608 Series

## 2" HIGH SPEED THERMAL PRINTER

### FTP-628 MCL101#11/ #21

### Easy Loading Method

#### ■ OVERVIEW

The easy loading FTP-608 MCL Series is ultra compact high speed, battery driven thermal printer, printing on 2-inch wide paper (58mm) where platens are removable. Our original platen removal mechanism improved paper loading and maintenance.

The FTP-608 MCL series can be used for a variety of applications, such as portable terminals, POS, ticket issuing terminals, label printers, banking terminals, and measurement and medical equipment.

#### ■ HIGHLIGHTS

- **Easy loading type**  
Our original platen removal mechanism improved paper loading and maintenance.
- **Ultra compact**  
Height 15.5 mm, width 70.2 mm, depth 33.0 mm for the 2 inch model.
- **Low drive power**  
3 or 5V operation.
- **High speed printing**  
It can print at 60 mm/s (480 dotlines/s) maximum by using Fujitsu's unique head drive control.
- **High resolution printing**  
8 dots/mm of resolution printing is possible.



# FTP-628MCL101#11/ #21

## ■ PART NUMBERS

| Item              |                    | Part Number  |
|-------------------|--------------------|--|
| Printer mechanism |                    | FTP-628MCL101 #11 without platen open detect switch<br>FTP-628MCL101 #21 without platen open detect switch |
| LSI for driving   |                    | TBA  |
| Interface Board   | Parallel           | TBA  |
|                   | Serial             | TBA  |
| Interface Cables  | Parallel           | TBA  |
|                   | Serial             | TBA  |
| Power cable       | Head, motor, logic | TBA  |

## ■ SPECIFICATIONS

| Item   | Specifications  |                                    |
|--|---|------------------------------------|
| Part number                                    | FTP-628MCL101#11  | FTP-628MCL101#21                   |
| Printing method                                | Thermal-line dot method   |                                    |
| Dot structure                                  | 384 dots/line   |                                    |
| Dot pitch (Horizontal)                         | 0.125 mm (8 dots/mm)—Dot density  |                                    |
| Dot pitch (Vertical)                           | 0.125 mm (8 dots/mm)—Line feed pitch  |                                    |
| Effective printing area                        | 48 mm   |                                    |
| Number of columns                              | ANK 32 columns/line (maximum 12x 24 dot font)   |                                    |
| Paper width                                    | 58 mm <sup>+0</sup> <sub>-0.1</sub>   |                                    |
| Paper thickness                                | 60 to 80 μ m (some paper in this range may not be used because of paper characteristics)  |                                    |
| Printing Speed                                 | Max. 60mm/sec. (480 dot line/sec.)  | max. 50mm/sec. (400 dot line/sec.) |
| Character types                                | Alphanumeric, katakana: 159 types<br>International and special characters: 195 types<br>JIS Kanji level 1, level 2, non-Kanji (supported only when Kanji CG is mounted): about 6800 types                   |                                    |
| Character, dimensions (H×W), number of columns | 12 × 24 dots, (1.5 × 3.0mm), 32 columns: ANK<br>24 × 24 dots, (3.0 × 3.0mm), 16 columns: ANK, Kanji<br>8 × 16 dots, (1.0 × 2.0 mm), 48 columns: ANK<br>16 × 16 dots, (2.0 × 2.0 mm), 24 columns: ANK, Kanji |                                    |

# FTP-628MCL101#11/ #21

## ■ SPECIFICATIONS

| Item                                |                            | Specification   |  |
|-------------------------------------|----------------------------|---|--|
|                                     |                            | FTP-628MCL101#11  | FTP-628MCL101#21   |
| Interface                           |                            | Conforms to RS232C / Centronics   |  |
| Operating Voltage                   | For print head             | 4.2 to 8.5VDC, average current 2.4A (at 7.4 (3A) peak<br>Printing ratio: 12.5%, printing speed 60mm/sec. at 7.2 V                                       | 2.7 to 7.2 VDC, average current 1.9A (3.8A) peak<br>Printing ratio: 12.5%, printing speed 40mm/sec. at 4.2 V |
|                                     | For motor                  | 4.2 to 8.5 VDC, 1 A max.  | 2.7 to 7.2 VDC, 1 A max.   |
|                                     | For logic                  | 2.7 to 5.25 VDC, 0.1 A maximum  |  |
| External dimensions                 |                            | 70.2 x 33.0 x 15.5 mm (WxDxH)   |  |
| Weight                              |                            | Approximately 42g   |  |
| Head life                           |                            | Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 25% or less) |  |
| Operating environment               | Operating temperature*     | 0° C to +50° C  |  |
|                                     | Operating humidity         | 20 to 85% RH (no condensation)  |  |
|                                     | Storage temperature        | -20° C to +60° C (paper not included )  |  |
|                                     | Storage humidity           | 5 to 95% RH (no condensation )  |  |
| Detection function                  | Head temperature detection | Detected by thermistor  |  |
|                                     | Paper out/mark detection   | Detected by photo-interrupter   |  |
| Recommended thermal sensitive paper |                            | High sensitive paper:   | TF50KS-E4 (Nippon Paper)   |
|                                     |                            | Standard paper:   | TK50KS-E (Nippon Paper)<br>PD150R (Oji Paper)<br>FTP-020P0107 (58mm)   |
|                                     |                            | Medium life storage paper:  | TK60KS-F1 (Nippon Paper)<br>FTP-020P0102 (58mm)<br>PD170R (Oji Paper)<br>AFP220VBB-1 (Mitsubishi Paper)      |
|                                     |                            | Long life storage paper:  | PD160R-N (Oji Paper)<br>AFP-235 (Mitsubishi Paper)<br>TP50KJ-R (Nippon Paper)<br>HA112AA (Nippon Paper)      |

\*+5° C to +40° C printing density assurance range (-25 to 70° C capability)


# FTP-628MCL101#11/ #21

## FUNCTION

| Item  | Item                                   |
|---|--|
| 1. Test print function                            | 8. Mark detection function             |
| 2. Paper out detection                            | 9. MCU operation abnormality detection |
| 3. Paper near end detection                       | 10. Power ON/OFF sequence protection   |
| 4. Thermal head temperature abnormality detection | 11. Motor over-current protection      |
| 5. Blow-out fuse detection                        | 12. Hardware timer                     |
| 6. Head voltage abnormality detection             |  |
| 7. Motor power saving function                    |  |

## DIMENSIONS

### 1. Printer mechanism: 2- inch

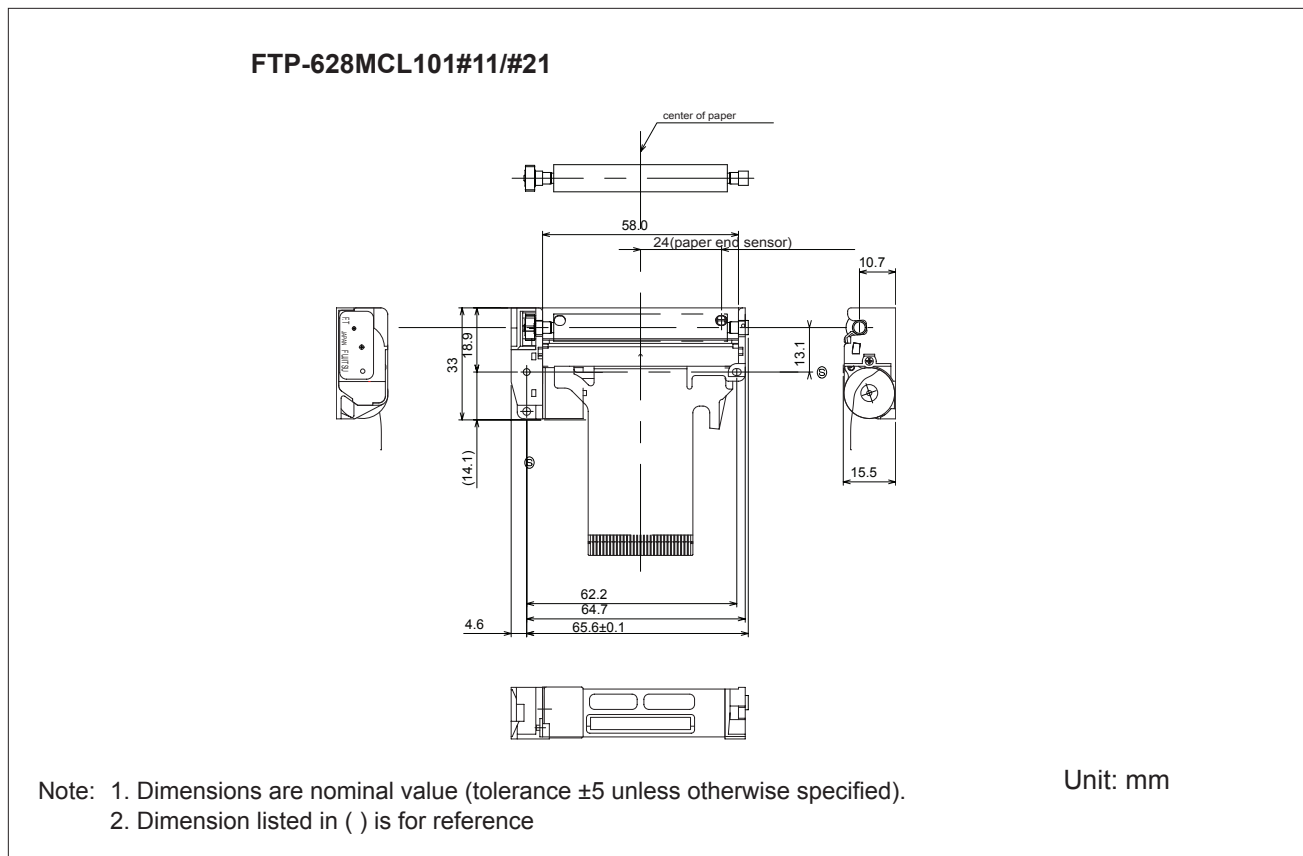

# FTP-628MCL101#11/ #21

## ■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS

### FTP-628 MCL101#11 / #21

Thermal head, control circuit side connector: 52610-3090 Molex or equivalent product

| No | Signal | I/O | Contents                                      |
|----|--------|-----|---|
| 1  | PHK    | —   | Cathode for photo interruptor                 |
| 2  | VSEN   | I   | paper sensor power                            |
| 3  | PHE    | O   | Emitter for photo interruptor                 |
| 4  | N.C.   | —   | No connection                                 |
| 5  | N.C.   | —   | No connection                                 |
| 6  | VH     | —   | Head drive power                              |
| 7  | VH     | —   |   |
| 8  | DIN    | I   | Data in                                       |
| 9  | CLK    | I   | Synchronous clock for communication           |
| 10 | GND    | —   | Ground power supply for thermal head          |
| 11 | GND    | —   |   |
| 12 | STB6   | I   | Thermal head energizing control signal        |
| 13 | STB5   | I   |   |
| 14 | STB4   | I   |   |
| 15 | VDD    | I   | Logic power                                   |
| 16 | TH     | O   | Thermally sensitive resistor input terminal 1 |
| 17 | TH     | O   | Thermally sensitive resistor input terminal 2 |
| 18 | STB3   | I   | Thermal head energizing control signal        |
| 19 | STB2   | I   |   |
| 20 | STB1   | I   |   |
| 21 | GND    | —   | Ground power supply for thermal head          |
| 22 | GND    | —   |   |
| 23 | LAT    | I   | Data latch                                    |
| 24 | DO     | O   | Data out                                      |
| 25 | VH     | I   | Power supply for thermal head                 |
| 26 | VH     | I   |   |
| 27 | MT/A   | I   | Stepping motor excitation signal              |
| 28 | MT/A   | I   |   |
| 29 | MT/B   | I   |   |
| 30 | MT/B   | I   |   |

Do not plug or unplug the FPC when power is on.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: <http://www.fujitsu.com/us/services/edevices/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: <http://www.fujitsu.com/emea/services/components/>

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America does not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. reserves the right to change specifications/datasheets without prior notice. Rev. 03/22/2006.